



HIT Series Hydraulic IN-LINE T-Type Filters


Features:

HIT Series:

- Clear Anodized Aluminum
- 25 Micron Sintered Bronze Element
- 5000 PSIG (Hydraulic only) Max. Working Pressure
- Buna-N Seals 35°F to 200°F

Options:

Viton Seals, Suffix "V" 35°F to 400°F
 Micron Size, Suffix "10", "40", "90"
 (Example HIT-290), (Kit Example EK2-90)

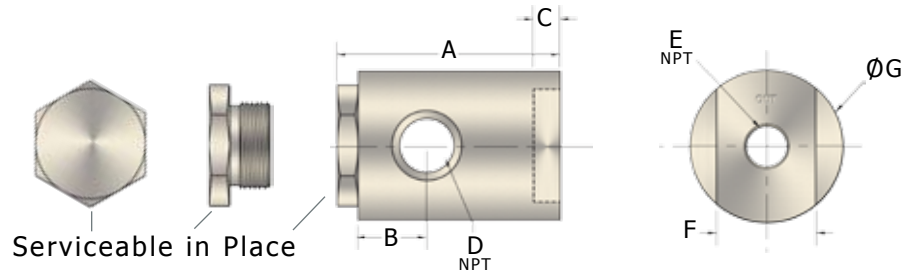

Dimensions:

Part	A	B	C	D NPT	E NPT	F	ØG	spring Kit	element Kit	Body	Element
HIT-2	3.18	0.96	0.38	1/4"	1/4"	1.38	2.13	SK2T	EK2	2011-T3 Aluminum	25 Micron Sintered Bronze
HIT-2V	3.18	0.96	0.38	1/4"	1/4"	1.38	2.13	SK2T	EK2V		
HIT-3	3.18	0.96	0.38	3/8"	3/8"	1.38	2.13	SK2T	EK2		
HIT-3V	3.18	0.96	0.38	3/8"	3/8"	1.38	2.13	SK2T	EK2V		

Part	A	B	C	D NPT	E NPT	F	ØG	spring Kit	element Kit	Body	Element
HIT-S6	3.18	1.01	0.38	3/8"	9/16"	1.38	2.13	SK2T	EK2	2011-T3 Aluminum	25 Micron Sintered Bronze
HIT-S6V	3.18	1.01	0.38	3/8"	9/16"	1.38	2.13	SK2T	EK2V		

Characteristics

