

BHM-T SERIES BRONZE 3-WAY L-PORT BALL VALVES

ALL SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE




BHM-T SERIES

- 29"Hg - 400 PSIG WOG, Cold Non-Shock
- Blowout-Proof Stem, with Adjustable Packing
- Chrome Plated Brass Ball
- RTFE Seats
- 150 PSIG Saturated Steam
- Temperature: -35°F to 400°F



NPT SIZE	PART #	PART # W/LOCK
1/4"	BHM-2T	BHM-2TLL
3/8"	BHM-3T	BHM-3TLL
1/2"	BHM-4T	BHM-4TLL
3/4"	BHM-6T	BHM-6TLL
1"	BHM-8T	BHM-8TLL
1-1/4"	BHM-10T	BHM-10TLL
1-1/2"	BHM-12T	BHM-12TLL
2"	BHM-16T	BHM-16TLL

Flow Diagram "L" Port

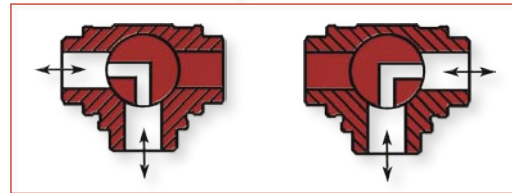


B2S-TL SERIES BRASS 3-WAY L-PORT & T-PORT BALL VALVES

B2S-TL + TT SERIES

- 29"Hg - 400 PSIG WOG, Cold Non-Shock
- Blowout-Proof Stem, with Adjustable Packing
- Chrome Plated Brass Ball & Stem
- RTFE Seats
- 100 PSIG Saturated Steam
- Temperature: -20°F to 400°F
- Direct Mount for Activation (See Actuated Valves pg.7)



Flow Diagram

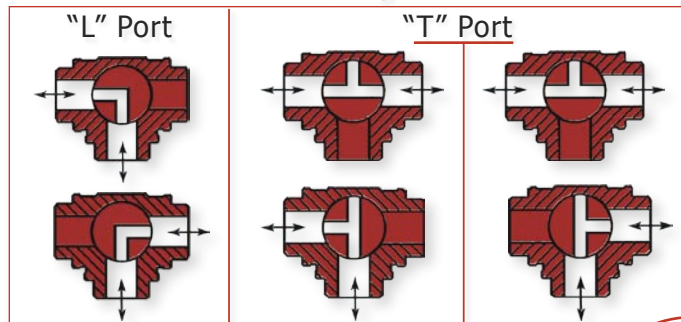

NPT SIZE	L-PORT	T-PORT
1/4"	B2S-2TL	B2S-2TT
3/8"	B2S-3TL	B2S-3TT
1/2"	B2S-4TL	B2S-4TT
3/4"	B2S-6TL	B2S-6TT
1"	B2S-8TL	B2S-8TT
1-1/4"	B2S-10TL	B2S-10TT
1-1/2"	B2S-12TL	B2S-12TT
2"	B2S-16TL	B2S-16TT
2-1/2"	B2S-20TL	B2S-20TT
3"	B2S-24TL	B2S-24TT

