

CF58M SERIES CARBON 2-WAY HIGH PRESSURE BALL VALVES


ALL SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE



CF58M & CF58M-LP SERIES

- Blowout-Proof Stem
- Delrin Seats & Viton Seals
- Temp. 14°F to 140°F (1/4"-1")
- Temp. 14°F to 176°F (1-1/4"-2")
- Full Port, (C51M Models Reduced Port)
- Option: Suffix "LP" for Locking Plate
- All Working Pressures are Cold Non-Shock

NPT SIZE	NPT PART #	SAE SIZE	SAE PART #	PORT	WORKING PRESSURE
1/4"	CF75M-2	7/16"-20	CF75M-S4	Full Port	7500 PSI
3/8"	CF75M-3	9/16"-18	CF75M-S6	Full Port	7500 PSI
1/2"	CF75M-4	3/4"-16	CF75M-S8	Full Port	7500 PSI
3/4"	CF58M-6	1-1/16"-12	CF58M-S12	Full Port	5880 PSI
1"	CF51M-8	1-5/16"-12	CF51M-S16	Full Port	5145 PSI
1-1/4"	C51M-10	1-5/8"-12	C51M-S20	Reduced Port	5145 PSI
1-1/2"	C51M-12	1-7/8"-12	C51M-S24	Reduced Port	5145 PSI
1-1/4"	CF61M-10	1-5/8"-12	CF61M-S20	Full Port	6175 PSI
1-1/2"	CF61M-12	1-7/8"-12	CF61M-S24	Full Port	6175 PSI
2"	CF61M-16	2-1/2"-12	CF61M-S32	Full Port	6175 PSI

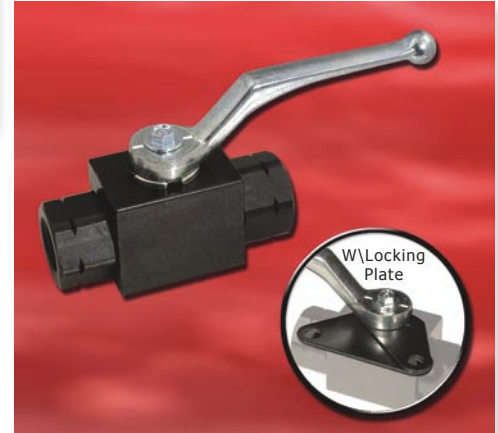

CF58M-TL SERIES CARBON 3-WAY HIGH PRESSURE BALL VALVES

CF58M-TL & CF58M-TL-LP SERIES

- Blowout-Proof Stem
- Delrin Seats & Viton Seals
- Temp. 14°F to 140°F (1/4"-1")
- Temp. 14°F to 176°F (1-1/4"-2")
- "L" Port
- Option: Suffix "LP" for Locking Plate
- All Working Pressures are Cold Non-Shock

NPT SIZE	NPT PART #	SAE SIZE	SAE PART #	WORKING PRESSURE
1/4"	CF58M-2TL	7/16"-20	CF58M-S4TL	5880 PSI
3/8"	CF58M-3TL	9/16"-18	CF58M-S6TL	5880 PSI
1/2"	CF51M-4TL	3/4"-16	CF51M-S8TL	5145 PSI
3/4"	CF51M-6TL	1-1/16"-12	CF51M-S12TL	5145 PSI
1"	CF51M-8TL	1-5/16"-12	CF51M-S16TL	5145 PSI
1-1/4"	CF51M-10TL	1-5/8"-12	CF51M-S20TL	5145 PSI
1-1/2"	CF51M-12TL	1-7/8"-12	CF51M-S24TL	5145 PSI
2"	CF51M-16TL	2-1/2"-12	CF51M-S32TL	5145 PSI



C11M SERIES CARBON 2-WAY ULTRA HIGH PRESSURE BALL VALVES

C11M + C11M-LL SERIES

- Blowout Proof Stem
- Delrin Seats
- Viton Seals
- Temperature 14°F to 140°F
- Option: Suffix "LP" for Locking Plate
- All Working Pressure are Cold Non-Shock

NPT SIZE	NPT PART #	PART # W/LOCK	WORKING PRESSURE
1/4"	C11M-2	C11M-2LP	11,760 PSI
3/8"	C11M-3	C11M-3LP	11,760 PSI
1/2"	C11M-4	C11M-4LP	11,760 PSI
3/4"	C11M-6	C11M-6LP	11,760 PSI
1"	C11M-8	C11M-8LP	11,760 PSI

