

## C2FF300 SERIES CARBON FULL PORT ANSI 300 FULL FLANGED VALVES


ALL SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE



### C2FF300 SERIES

- Full Port
- 29"hg - 740 PSI, Cold Non-Shock
- Carbon Steel ASTM A216 WCB, ANSI 300
- Trunnion Type Ball Support (6" to 12" Only)
- Locking Device Standard
- Live Loaded Stem Design, Anti-Static Device
- Spiral Wound Body Gasket with Secondary Metal to Metal Seal
- Temperature -50°F to 400°F
- Fire Safe Approved API 607-4

SIZE	PART #
1/2"	C2FF300-4
3/4"	C2FF300-6
1"	C2FF300-8
1-1/4"	C2FF300-10
1-1/2"	C2FF300-12
2"	C2FF300-16
2-1/2"	C2FF300-20
3"	C2FF300-24
4"	C2FF300-32
6"	C2FF300-48
8"	C2FF300-64
10"	C2FF300-80
12"	C2FF300-96

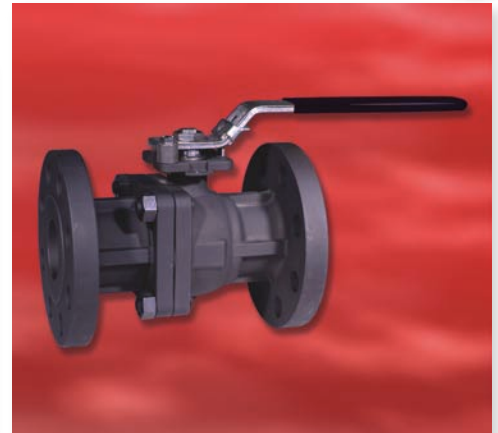


## CWFS150 SERIES CARBON 3-WAY L PORT ANSI 150 FULL FLANGED

### CWFS150 SERIES

- 3-Way, Diverter, Two Seats, Reduced L-Port
- 29"hg - 285 PSI, Cold Non-Shock
- Carbon Steel A105, ANSI 150
- Temperature -4°F to 344°F
- P.T.F.E. Seats, Packing & Thrust Washer
- Blow Out Proof Stem, Adjustable Stem Packing
- Fire Safe Approved API 6FA-BS6755/2

SIZE	PART #
1/2"	CWFS150-4TL
3/4"	CWFS150-6TL
1"	CWFS150-8TL
1-1/4"	CWFS150-10TL
1-1/2"	CWFS150-12TL
2"	CWFS150-16TL
2-1/2"	CWFS150-20TL
3"	CWFS150-24TL
4"	CWFS150-32TL
5"	CWFS150-40TL
6"	CWFS150-48TL



## SWFF150 SERIES STAINLESS ANSI 150 WAFER FLANGED VALVES

### SWFF150 SERIES

- Full Port
- 29"hg - 285 PSI, Cold Non-Shock
- Stainless Steel ASTM A351-CF8M ANSI 150
- Temperature -4°F to 366°F
- P.T.F.E. Seats, Packing & Thrust Washer
- Blow Out Proof Stem, Adjustable Stem Packing

SIZE	PART #
1/2"	SWFF150-4
3/4"	SWFF150-6
1"	SWFF150-8
1-1/4"	SWFF150-10
1-1/2"	SWFF150-12
2"	SWFF150-16
2-1/2"	SWFF150-20
3"	SWFF150-24
4"	SWFF150-32
5"	SWFF150-40
6"	SWFF150-48
8"	SWFF150-64

