

SWFS150 SERIES STAINLESS 3-WAY L-PORT ANSI 150 FLANGED VALVES



ALL SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE



SWFS150 SERIES

- 29"hg - 285 PSI, Cold Non-Shock
- Stainless Steel AISI 316, ANSI 150
- 3-Way, Diverter, Two Seats, Reduced L-Port
- Temperature -4°F to 344°F
- P.T.F.E. Seats, Packing & Thrust Washer, w/Adjustable Stem Packing

SIZE	PART #
1/2"	SWFS150-4TL
3/4"	SWFS150-6TL
1"	SWFS150-8TL
1-1/2"	SWFS150-12TL
2"	SWFS150-16TL
3"	SWFS150-24TL
4"	SWFS150-32TL
6"	SWFS150-48TL
8"	SWFS150-64TL

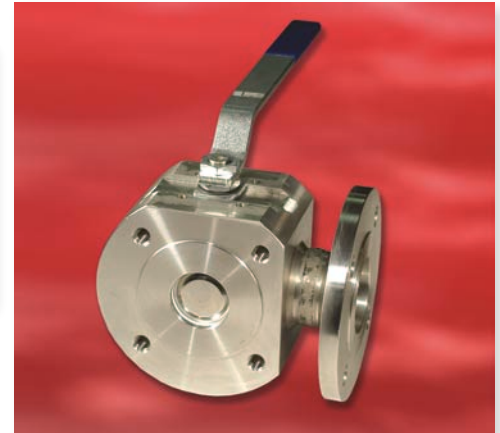

BGV SERIES BRASS 2-WAY GATE VALVES



BGV SERIES

- Suitable For Water-Works, Domestic & Agricultural
- Finely Cast Sand Blasted Heavy Brass Body
- Low Pressure Drop
- P.T.F.E. Seats and Seals
- Non Rising Stem
- Cast Steel Hand-Wheel
- NPT Female by Female Threads
- 200 PSI Cold Non-Shock Working Pressure
- +40°F to +200°F Temperature Range
- Optional Solder End Connections

SIZE	PART #
1/2"	BGV-4
3/4"	BGV-6
1"	BGV-8
1-1/4"	BGV-10
1-1/2"	BGV-12
2"	BGV-16
2-1/2"	BGV-20
3"	BGV-24
4"	BGV-32

PART MATERIAL

- Body - OT58 Brass
- Gate - OT58 Brass
- Stem - OT58 Brass
- Body Cap Sealing - PTFE
- Cap - OT58 Brass
- Stem Ring - OT58 Brass
- Package Gland Seal - PTFE
- Packing Gland - OT58 Brass
- Packing Gland Nut - OT58 Brass
- Red Round Handle - Steel
- Disc - OT58 Brass
- Handle Nut - OT58 Brass

