




## BGV SERIES GATE VALVE



### Features:

- 200 psi Non-Shock CWP
- Non Rising Stem
- PTFE Stem Seal
- NPT Female by Female Std.
- Solder End Available C/F
- Cast Aluminum Hand Wheel
- Temperature 40°F to 200°F

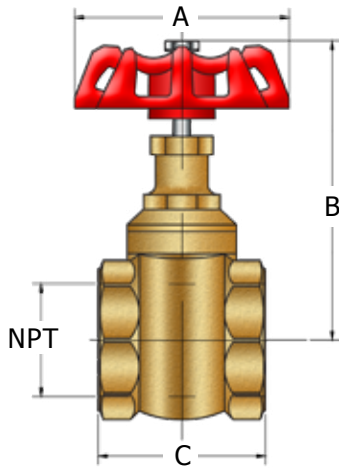

### Dimensions

PART #	NPT	A	B	C	ØD*	Psi	Wt. Lbs.
BGV-4	1/2"	2.13	2.80	1.69	0.50	200	0.50
BGV-6	3/4"	2.13	2.99	1.77	0.67	200	0.65
BGV-8	1"	2.44	3.45	2.05	0.83	200	0.95
BGV-10	1-1/4"	2.68	3.96	2.32	1.06	200	1.40
BGV-12	1-1/2"	2.68	4.37	2.48	1.34	200	1.90
BGV-16	2"	3.07	5.16	2.72	1.77	200	2.75
BGV-20	2-1/2"	3.94	6.34	3.47	2.21	200	5.65
BGV-24	3"	4.33	7.42	3.74	2.67	200	7.25
BGV-32	4"	5.12	9.13	4.49	3.54	200	C/F

### Bill of Materials

PART	Material
Body	Brass CW 617N
Gate	
Stem	
Body Cap Sealing	PTFE
Cap	Brass CW 617N
Stem Ring	Brass CW 617N
Packing Gland Seal	PTFE
Packing Gland	Brass
Packing Gland Nut	CW 617N
Red Round Handle	Steel
Disc	Aluminum
Handle Nut	Brass CW 617N

